



L U X - L I 3 O M

CARACTÉRISTIQUES GÉNÉRALES


DESCRIPTION	Hotte de cuisine
INSTALLATION	Îlot

CONCEPTION


MATÉRIEL	Acier inoxydable 430
VOLTS	120 VAC
HERTZ	60
AMPÈRES	5
ASPIRATION 1 ^{ÈRE} VITESSE	200 PCM
ASPIRATION 6 ^E VITESSE	870 PCM
DÉCIBELS (1 ^{ÈRE} VITESSE)	25 DBA
DÉCIBELS (6 ^E VITESSE)	63 DBA
COMMANDE	Mécanique, 3 vitesses
FILTRES	Aluminium / 3 pcs / 8-3/4" x 17-1/4"
DIAMÈTRE DE LA SORTIE	6" rond
LUMIÈRE	4 X GU10 Halogène 20W
AVEC PLAQUE AU GAZ	Autorité
CONFORMITÉS	UL 507 et CSA C22.2 N° 113-10
GARANTIE	1 an



PERFORMANCE D'ASPIRATION

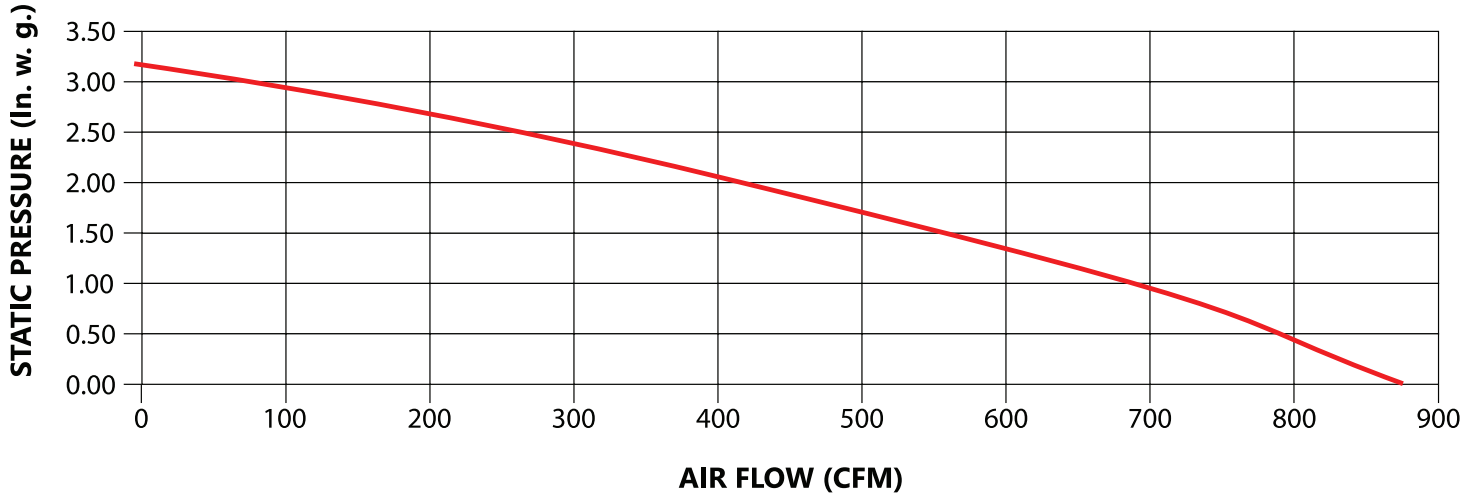

DESSIN TECHNIQUE (POUCES)

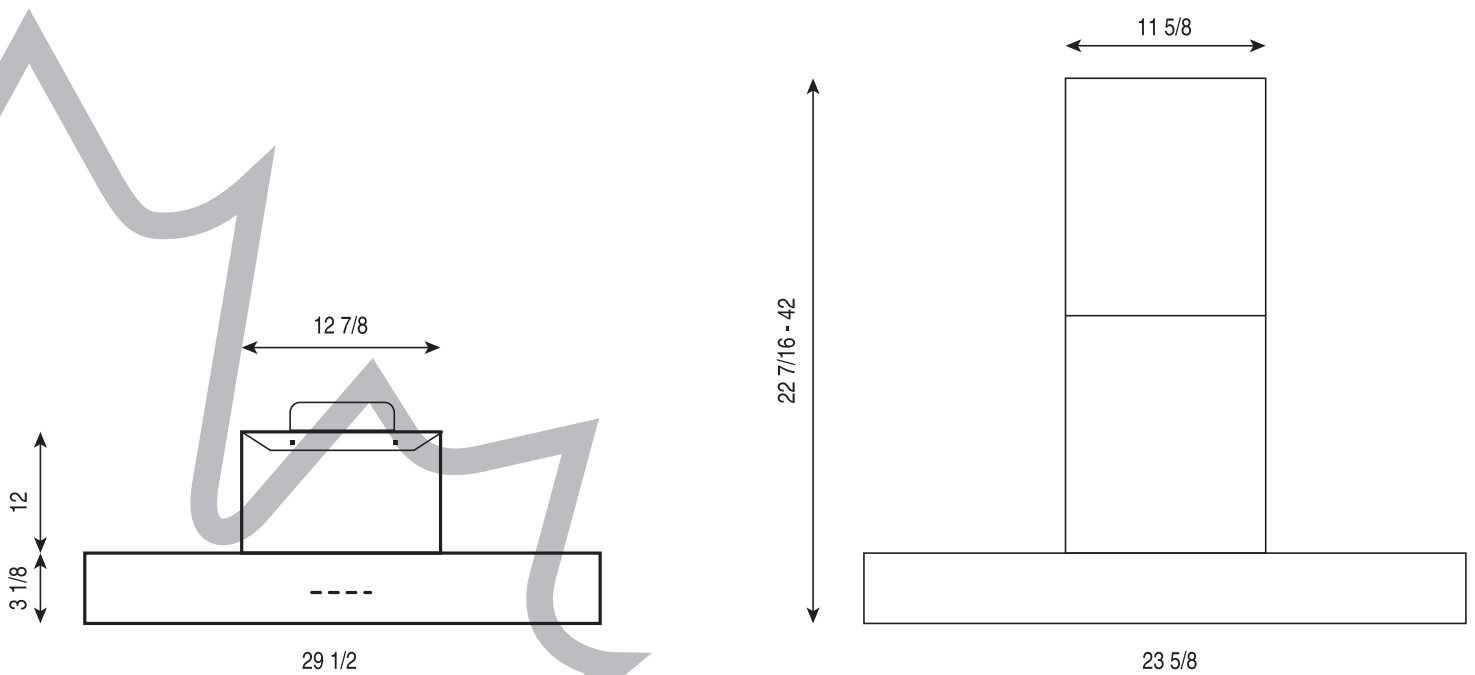



L U X - L I 3 O M

GENERAL CHARACTERISTICS

DESCRIPTION	Range hood
INSTALLATION	Island mounted


DESIGN FEATURES

MATERIAL	430 stainless steel
VOLTS	120 VAC
HERTZ	60
AMPS	5
SUCTION (1 st SPEED)	200 CFM
SUCTION (6 th SPEED)	870 CFM
DECIBELS (1 st SPEED)	25 DBA
DECIBELS (6 th SPEED)	63 DBA
SWITCH	Mechanical 3 speeds
FILTERS	Aluminum / 3 pcs / 8-3/4" x 17-1/4"
DUCTING SIZE	6" rond
LIGHTS	4x GU10 Halogen 1.5 W
USE WITH GAS COOKTOP	Allowed by regulation
COMPLIANCES	UL 507 et CSA C22.2 N° 113-10
WARRANTY	1 year






AIR FLOW PERFORMANCE

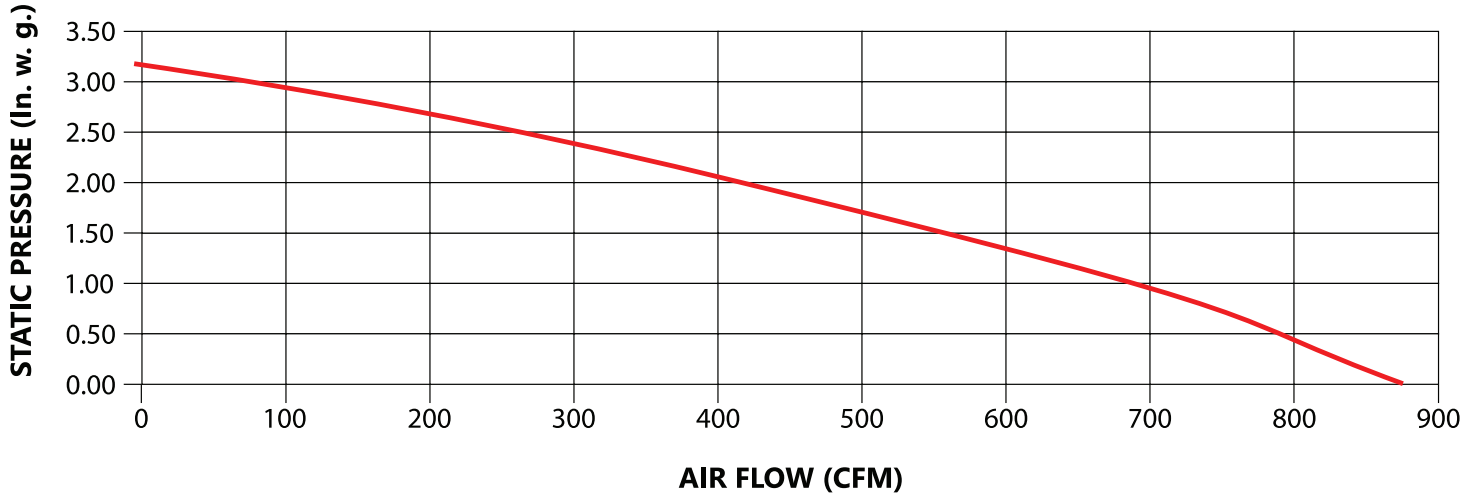

TECHNICAL DRAWING (INCHES)

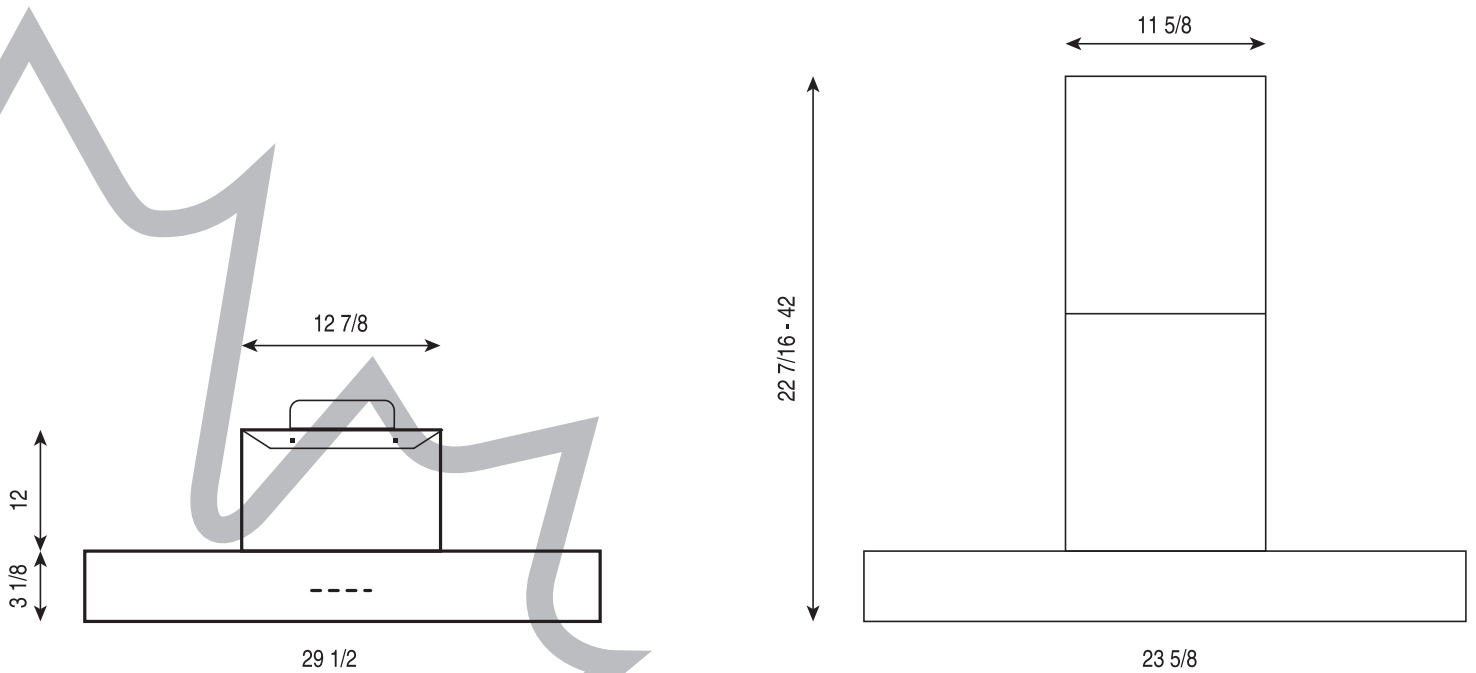

Recommended installation and maintenance: please consult our installation guide.

LUXCANADA.CA