



L U X - K I 3 6 L C D

CARACTÉRISTIQUES GÉNÉRALES

DESCRIPTION

Hotte de cuisine

INSTALLATION

Îlot



CONCEPTION

MATÉRIEL

Acier inoxydable 304 renforcé au nickel

VOLTS

120 VAC

HERTZ

60

AMPÈRES

4.3

ASPIRATION 1^{ÈRE} VITESSE

290 PCM

ASPIRATION 3^E VITESSE

870 PCM

DÉCIBELS (1^{ÈRE} VITESSE)

25 DBA

DÉCIBELS (3^E VITESSE)

63 DBA

COMMANDE

LCD, 3 vitesses avec minuterie

FILTRES

Chicane / 4 mcx / 8-3/4" x 12-1/8"

DIAMÈTRE DU PRODUIT

6" rond

LUMIÈRE

2 X GU10 LED 1.5 W

AVEC PLAQUE AU GAZ

Autorisé

CONFORMITÉS

UL 507 et CSA C22.2 N° 113-10


GARANTIE

1 an





L U X - K I 3 6 L C D

PERFORMANCE D'ASPIRATION

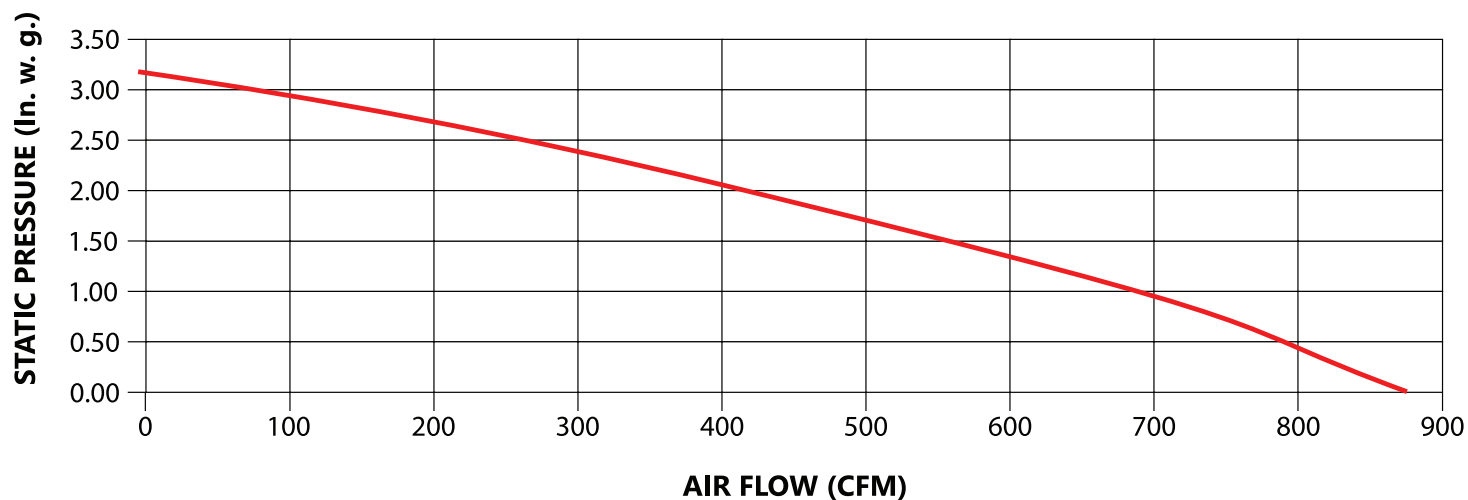

DESSIN TECHNIQUE (POUCES)

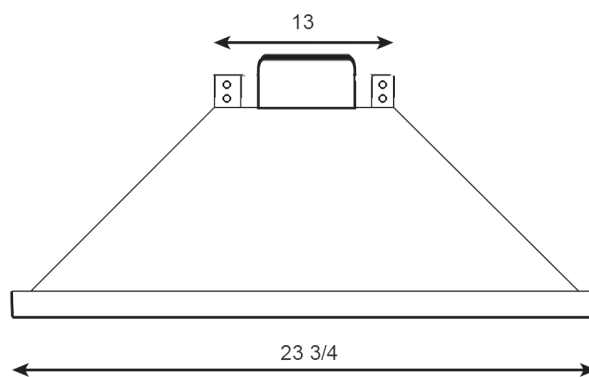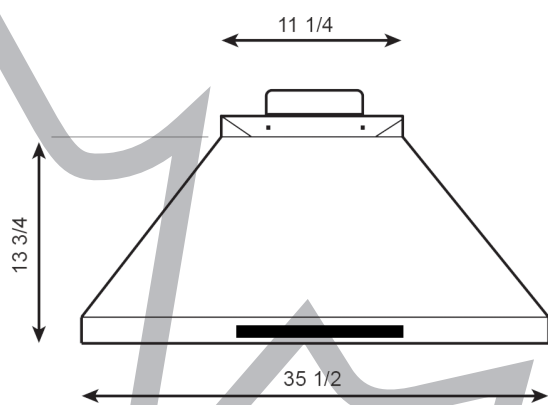



L U X - K I 3 6 L C D

GENERAL CHARACTERISTICS

DESCRIPTION

Range hood

INSTALLATION

Island mounted



DESIGN FEATURES

MATERIAL

304 nickel bearing stainless steel

VOLTS

120 VAC

HERTZ

60

AMPS

4.3

SUCTION (1st SPEED)

290 CFM

SUCTION (3rd SPEED)

870 CFM

DECIBELS (1st SPEED)

25 DBA

DECIBELS (3rd SPEED)

63 DBA

SWITCH

LCD, 3 Speeds with timer

FILTERS

Baffle / 4 pcs / 8-3/4" x 12-1/8"

DUCTING SIZE

6" round

LIGHTS

2 x GU10 LED 1.5W

USE WITH GAS COOKTOP

Allowed by regulation

COMPLIANCES


UL 507 et CSA C22.2 N° 113-10

WARRANTY

1 year



AIR FLOW PERFORMANCE

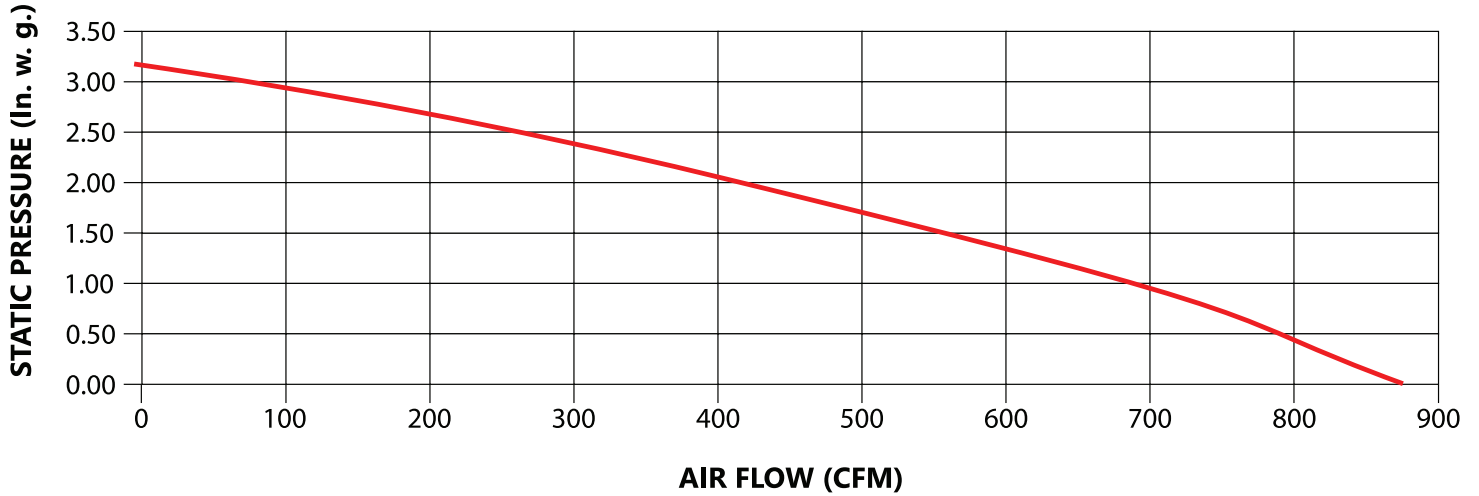

TECHNICAL DRAWING (INCHES)

