



L U X - K I 4 8 L C D

CARACTÉRISTIQUES GÉNÉRALES

DESCRIPTION	Hotte de cuisine
INSTALLATION	Îlot




CONCEPTION

MATÉRIEL	Acier inoxydable 304 renforcé
VOLTS	120 VAC
HERTZ	60
AMPÈRES	4.3
ASPIRATION 1 ^{ÈRE} VITESSE	290 PCM
ASPIRATION 3 ^È VITESSE	870 PCM
DÉCIBELS (1 ^{ÈRE} VITESSE)	25 DBA
DÉCIBELS (3 ^È VITESSE)	63 DBA
COMMANDE	LCD, 3 vitesses avec minuterie
FILTRES	Chicane / 4 mcx / 9-1/8" x 14- 5/8"
DIAMÈTRE DU PRODUIT	6" rond
LUMIÈRE	4 X GU10 LED 1.5 W
AVEC PLAQUE AU GAZ	Autorisé
CONFORMITÉS	UL 507 et CSA C22.2 N° 113-10
GARANTIE	1 an





L U X - K I 4 8 L C D

PERFORMANCE D'ASPIRATION

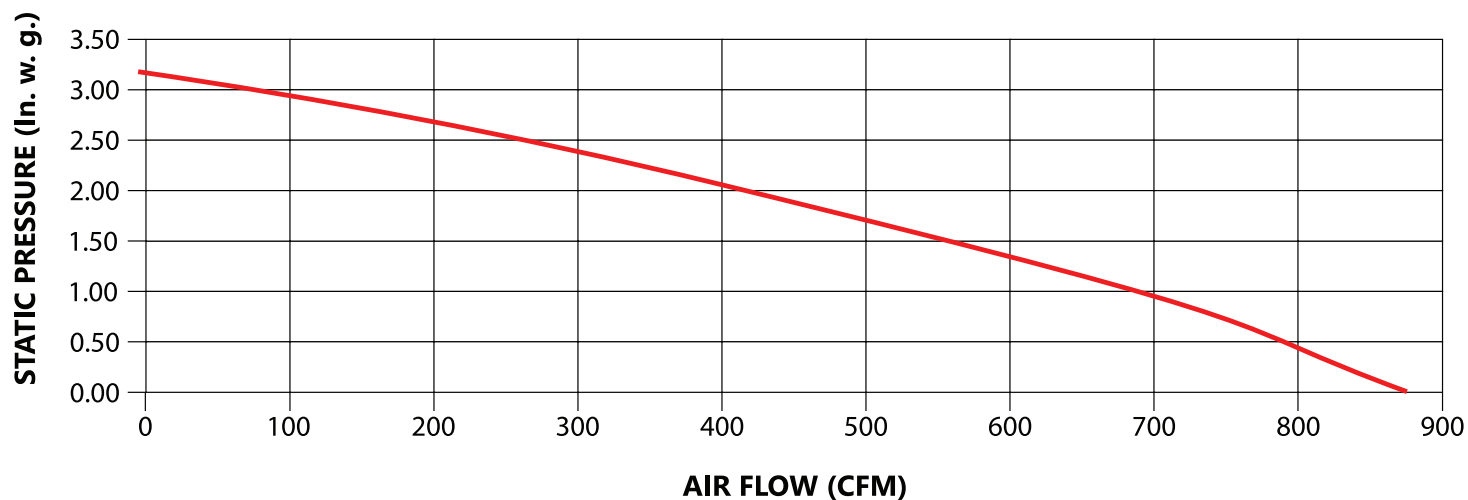

DESSIN TECHNIQUE (POUCES)

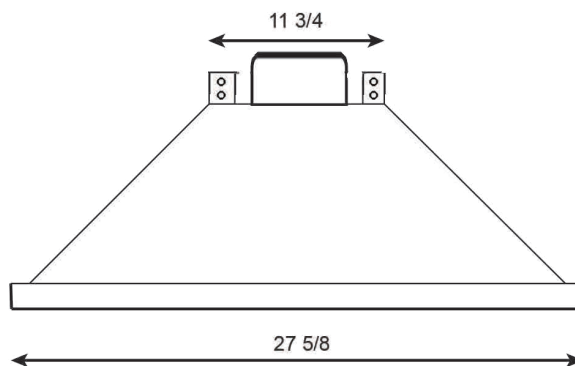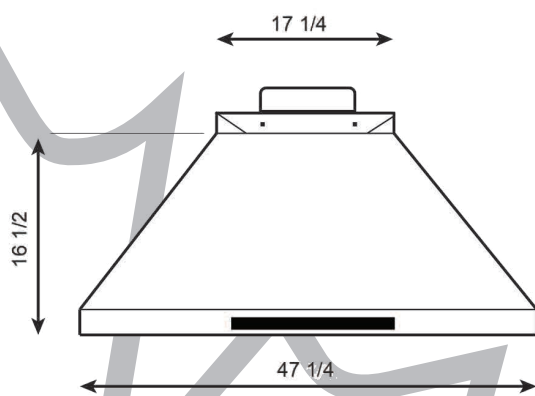



L U X - K I 4 8 L C D

GENERAL CHARACTERISTICS

DESCRIPTION	Range hood
INSTALLATION	Island mounted




DESIGN FEATURES

MATERIAL	304 nickel bearing stainless
VOLTS	120 VAC
HERTZ	60
AMPS	4.3
SUCTION (1st SPEED)	290 CFM
SUCTION (3rd SPEED)	870 CFM
DECIBELS (1st SPEED)	25 DBA
DECIBELS (3rd SPEED)	63 DBA
SWITCH	LCD, 3 Speeds with timer
FILTERS	Baffle / 4 pcs / 9-1/8" x 14-5/8"
DUCTING SIZE	6" round
LIGHTS	4 x GU10 LED 1.5W
USE WITH GAS COOKTOP	Allowed by regulation
COMPLIANCES	UL 507 et CSA C22.2 N° 113-10
WARRANTY	1 year





L U X - K I 4 8 L C D

AIR FLOW PERFORMANCE

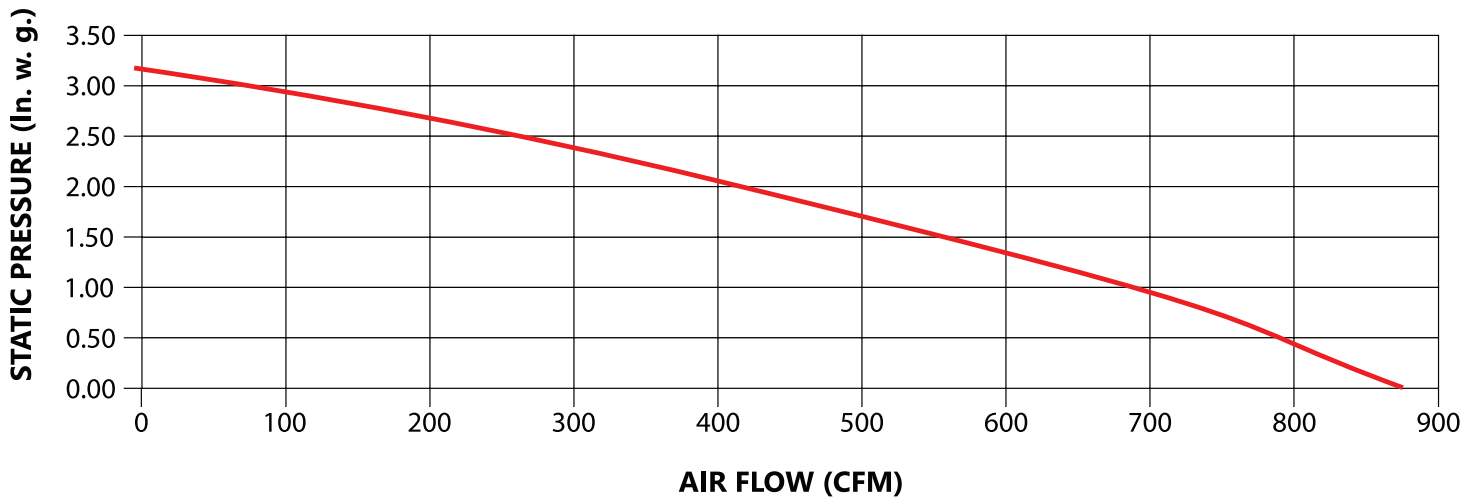

TECHNICAL DRAWING (INCHES)

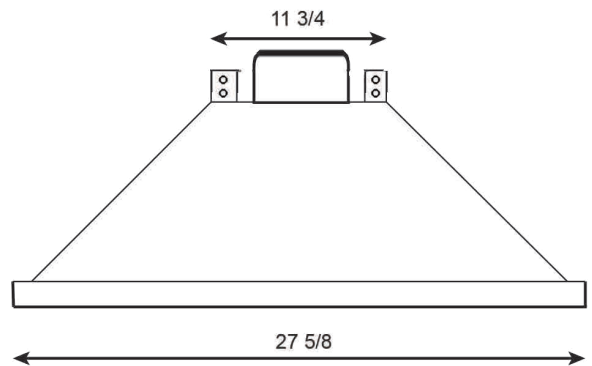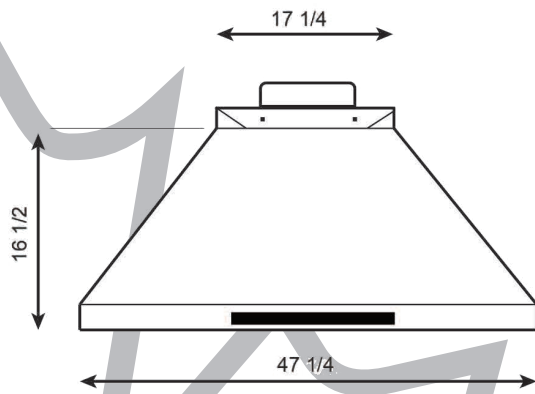

Recommended installation and maintenance : please consult our installalation guide.

LUXCANADA.CA