



L U X - K W 3 6 L C D

## CARACTÉRISTIQUES GÉNÉRALES

DESCRIPTION	Hotte de cuisine
INSTALLATION	Murale

## CONCEPTION


MATÉRIEL	Acier inoxydable 304 renforcé au nickel
VOLTS	120 VAC
HERTZ	60
AMPÈRES	4.3
ASPIRATION 1 <sup>ÈRE</sup> VITESSE	200 PCM
ASPIRATION 6 <sup>E</sup> VITESSE	870 PCM
DÉCIBELS (1 <sup>ÈRE</sup> VITESSE)	25 DBA
DÉCIBELS (6 <sup>E</sup> VITESSE)	63 DBA
COMMANDE	LCD, 6 vitesse avec minuterie
FILTRES	Chicane / 3 mcx / 8-3/4" x 13-3/4"
DIAMÈTRE DE LA SORTIE	6" rond
LUMIÈRE	2 x GU10 LED 1.5 W
AVEC PLAQUE AU GAZ	Autorisé
CONFORMITÉS	UL 507 et CSA C22.2 N° 113-10
GARANTIE	1 an






L U X - K W 3 6 L C D

## PERFORMANCE D'ASPIRATION

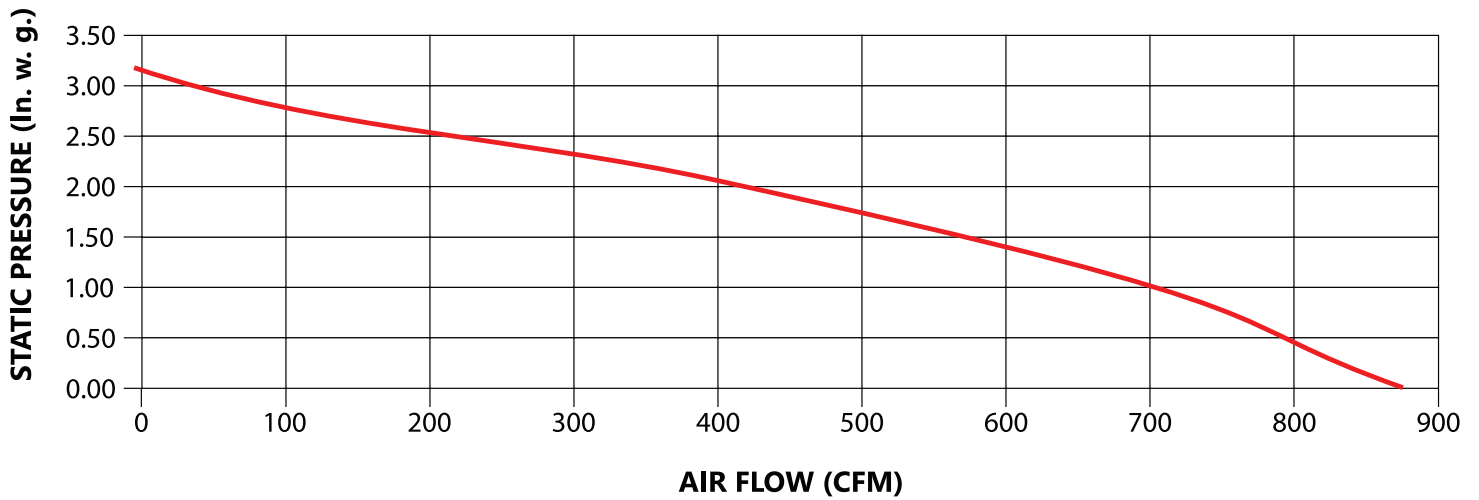

## DESSIN TECHNIQUE (POUCES)

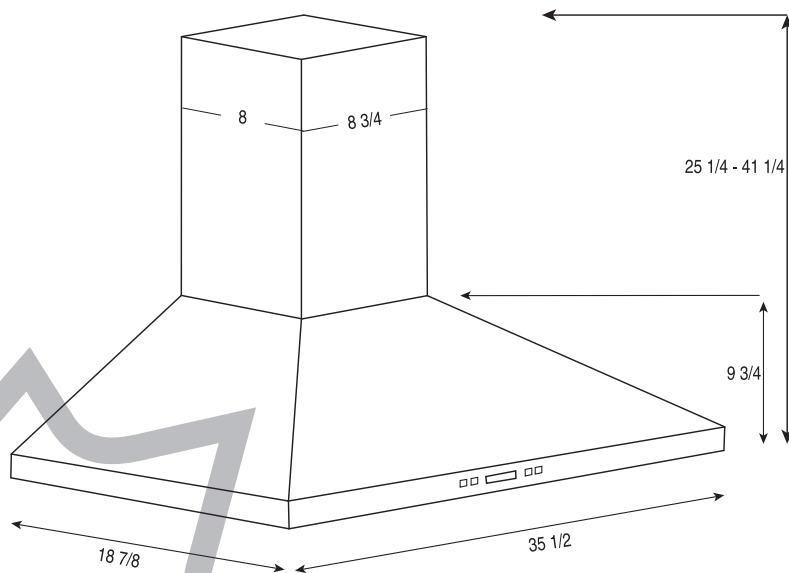



L U X - K W 3 6 L C D

## GENERAL CHARACTERISTICS

DESCRIPTION	Range hood
INSTALLATION	Wall mounted

## DESIGN FEATURES


MATERIAL	304 nickel bearing stainless steel
VOLTS	120 VAC
HERTZ	60
AMPS	4.3
SUCTION (1 <sup>st</sup> SPEED)	200 CFM
SUCTION (6 <sup>th</sup> SPEED)	870 CFM
DECIBELS (1 <sup>st</sup> SPEED)	25 DBA
DECIBELS (6 <sup>th</sup> SPEED)	63 DBA
SWITCH	LCD, 6 speeds with timer
FILTERS	Baffle / 3 pcs / 8-3/4" x 13-3/4"
DUCTING SIZE	6" round
LIGHTS	2x GU10 LED 1.5 W
USE WITH GAS COOKTOP	Allowed by regulation
COMPLIANCES	UL 507 et CSA C22.2 N° 113-10
WARRANTY	1 year






L U X - K W 3 6 L C D

## AIR FLOW PERFORMANCE

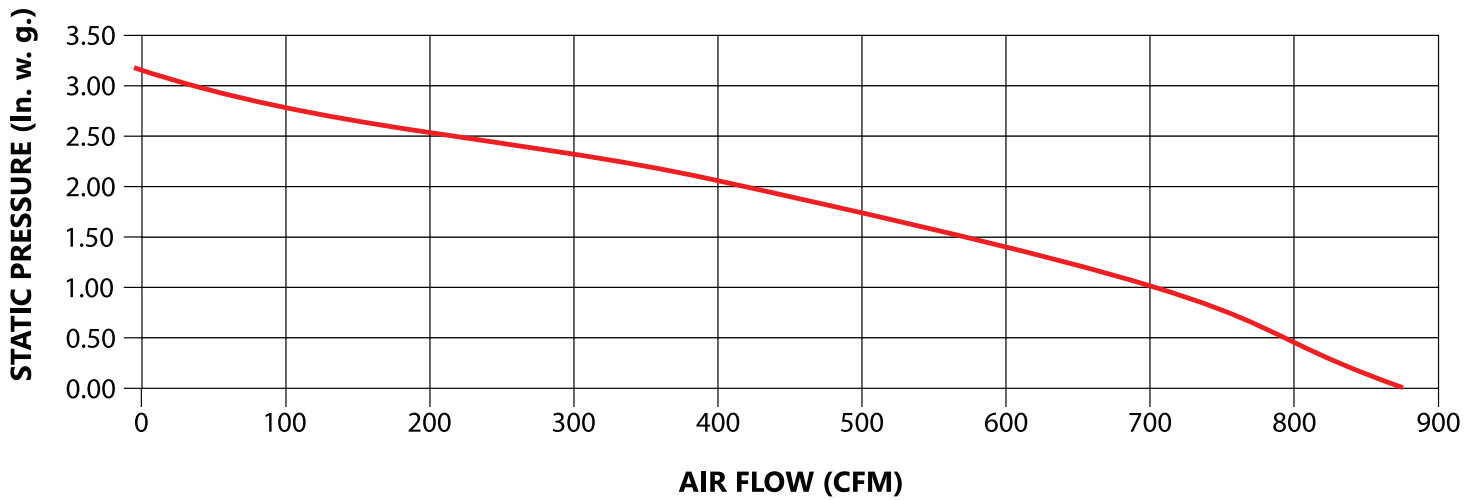

## TECHNICAL DRAWING (INCHES)

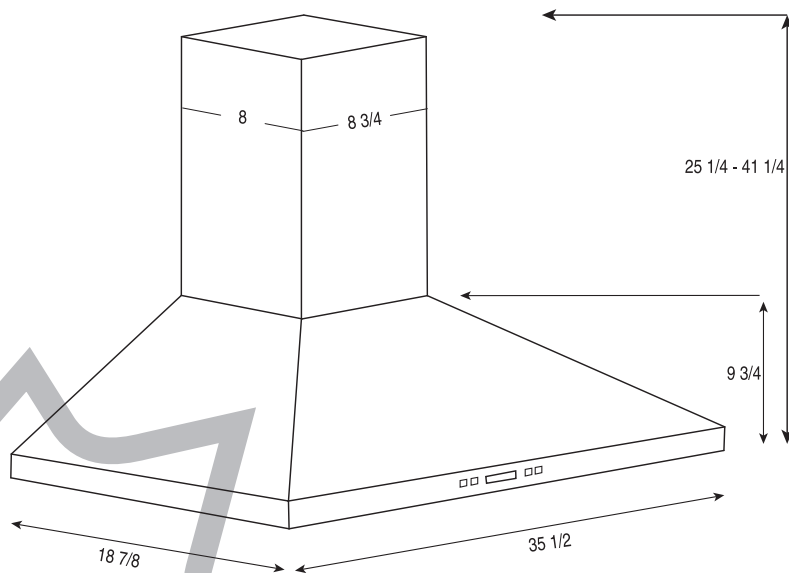

Recommended installation and maintenance: please consult our installation guide.

LUXCANADA.CA