



L U X - S F W 3 0 M

## CARACTÉRISTIQUES GÉNÉRALES

DESCRIPTION	Hotte de cuisine
INSTALLATION	Murale


## CONCEPTION

MATÉRIEL	Acier inoxydable 430 / Verre trempé
VOLTS	120 VAC
HERTZ	60
AMPÈRES	5
ASPIRATION 1 <sup>ÈRE</sup> VITESSE	200 PCM
ASPIRATION 6 <sup>E</sup> VITESSE	870 PCM
DÉCIBELS (1 <sup>ÈRE</sup> VITESSE)	25 DBA
DÉCIBELS (6 <sup>E</sup> VITESSE)	63 DBA
COMMANDE	Mécanique, 3 vitesses
FILTRES	Aluminium / 1 morceau / 15-3/4" x 11-1/16
DIAMÈTRE DE LA SORTIE	6" rond
LUMIÈRE	2 x GU10 Halogène 1.5 W
AVEC PLAQUE AU GAZ	Autorisé
CONFORMITÉS	UL 507 et CSA C22.2 N° 113-10
GARANTIE	1 an






## PERFORMANCE D'ASPIRATION

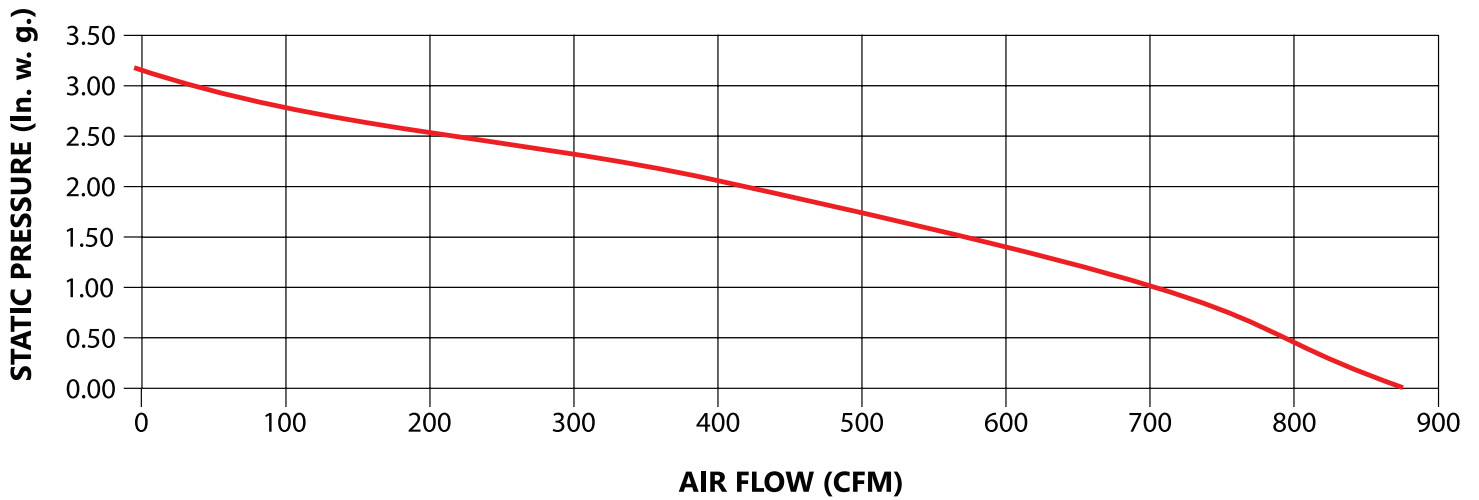

## DESSIN TECHNIQUE (POUCES)

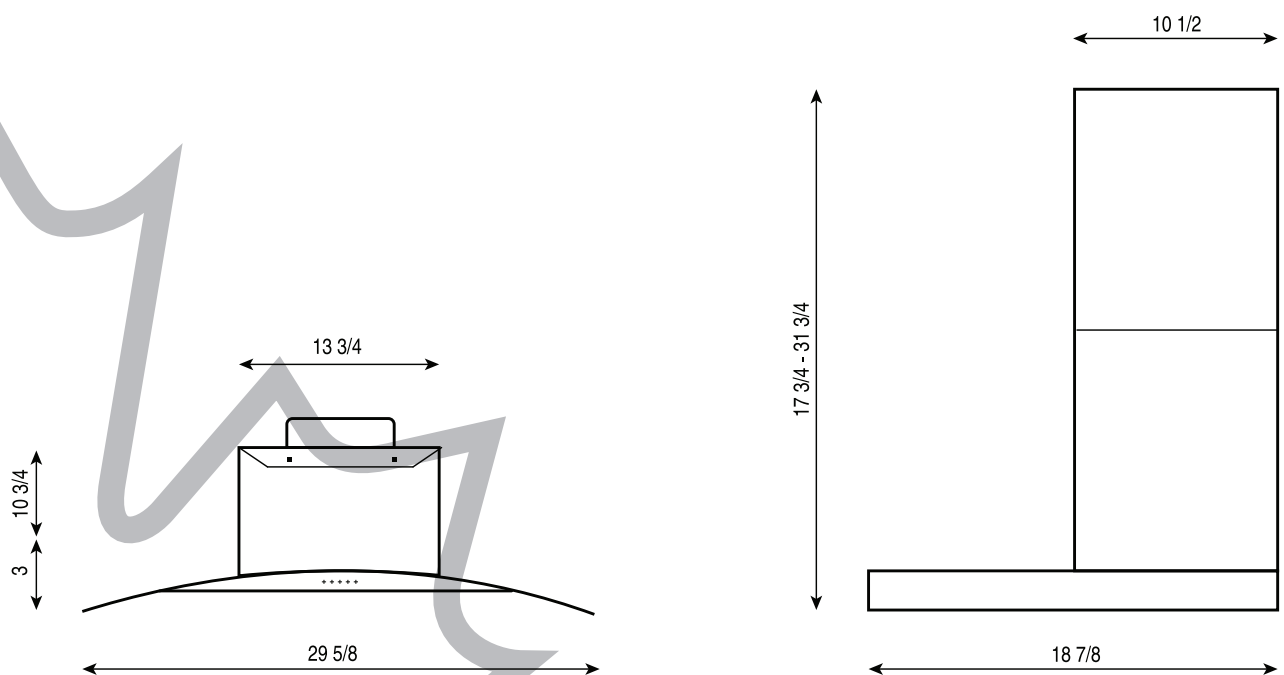



L U X - S F W 3 0 M

## GENERAL CHARACTERISTICS

DESCRIPTION	Range hood
INSTALLATION	Wall mounted


## DESIGN FEATURES

MATERIAL	430 nickel bearing stainless steel Tempered glass
VOLTS	120 VAC
HERTZ	60
AMPS	5
SUCTION (1 <sup>st</sup> SPEED)	200 CFM
SUCTION (6 <sup>th</sup> SPEED)	870 CFM
DECIBELS (1 <sup>st</sup> SPEED)	25 DBA
DECIBELS (6 <sup>th</sup> SPEED)	63 DBA
SWITCH	Mechanical, 3 speeds
FILTERS	Aluminum / 1 pc / 15-3/4" x 11-1/16
DUCTING SIZE	6" round
LIGHTS	2x GU10 Halogen 1.5 W
USE WITH GAS COOKTOP	Allowed by regulation
COMPLIANCES	UL 507 et CSA C22.2 N° 113-10
WARRANTY	1 year






## AIR FLOW PERFORMANCE

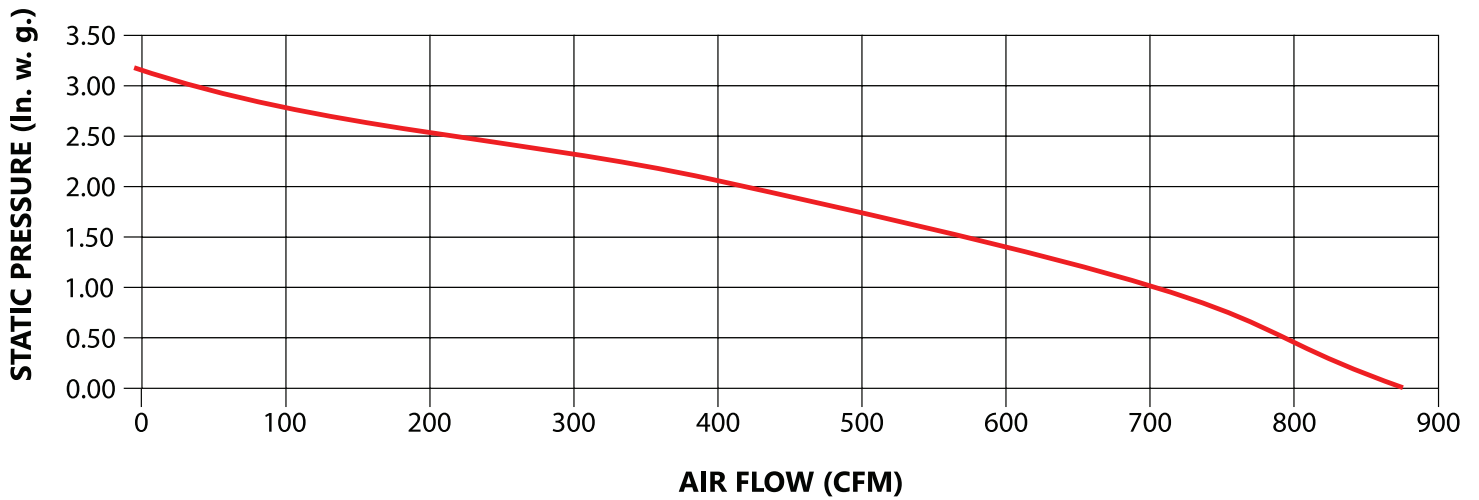

## TECHNICAL DRAWING (INCHES)

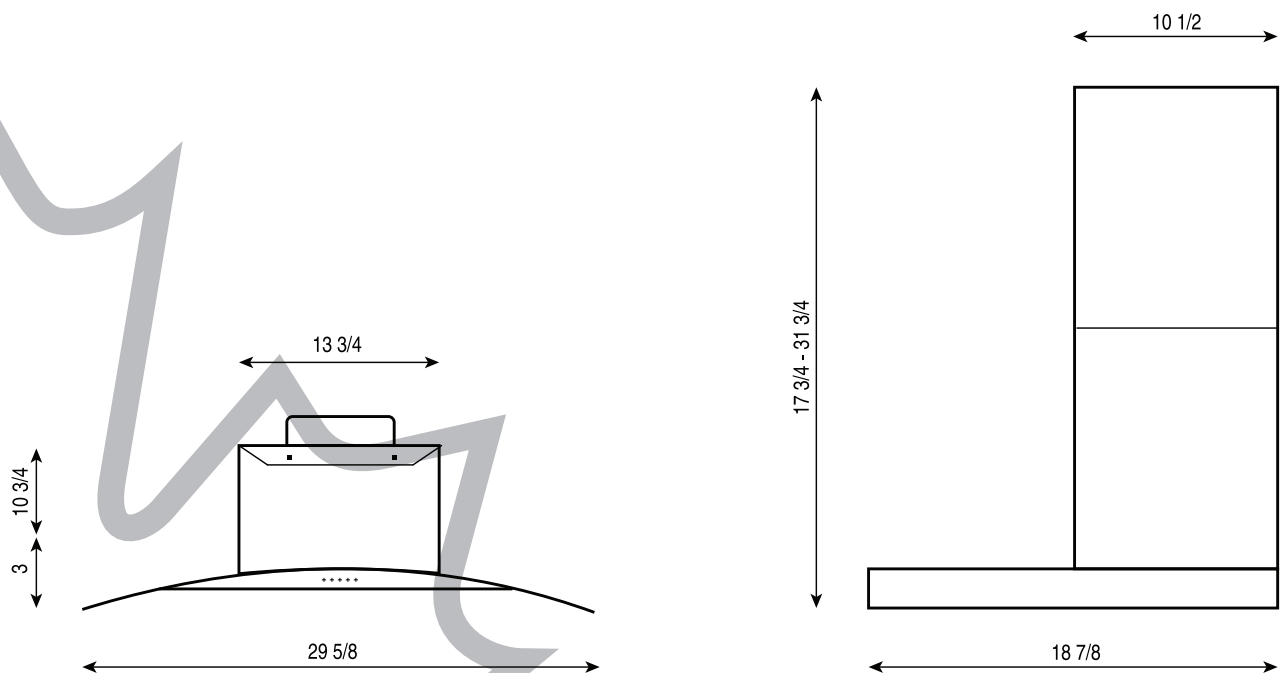

Recommended installation and maintenance: please consult our installation guide.

LUXCANADA.CA